


IMPORTANT

DODGE D50/ MITSUBISHI PICK UPS 2.0L, 2.4L, AND 2.6L ENGINES 1982-1990


CABLE ACTUATED CLUTCHES

TO PROPERLY ADJUST THE CLUTCH THE FOLLOWING PROCEDURES MUST BE FOLLOWED. THE CLUTCH PEDAL HEIGHT MUST BE BETWEEN 6 1/2" - 6 3/4" IF THE CLUTCH PEDAL HEIGHT IS OUT OF SPECIFICATION, ROTATE THE PEDAL STOP (FIG 1) UNTIL SPECIFIED DIMENSION IS OBTAINED. TO ADJUST THE CABLE, (2) PULL TIGHTLY ON THE CABLE AT THE FIREWALL, TURNING THE ADJUSTING NUT UNTIL IT IS SET BETWEEN .120" - .160". CYCLE THE CLUTCH PEDAL SEVERAL TIMES AND RECHECK THE CLEARANCE. MAKE ANY NECESSARY ADJUSTMENTS AS REQUIRED.

(1)

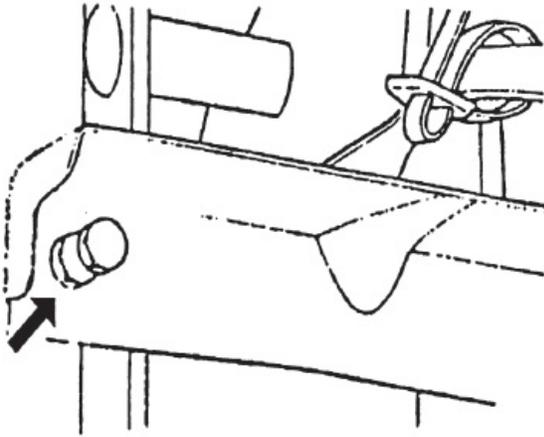

(2)

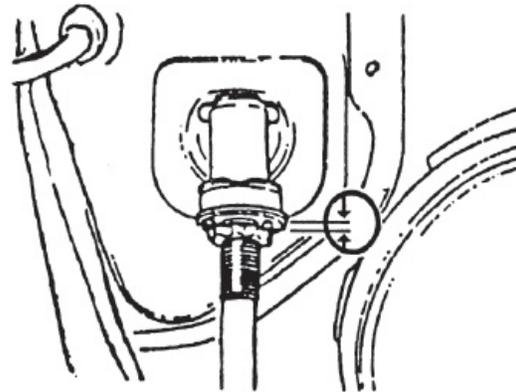

"NOTE" Centerforce tip sheets are for general reference only. Please refer to your owners manual for vehicle specifications.

IMPORTANT